


# S3 Manifold – Thermomanometer

WHS-M-S3-GAUGE

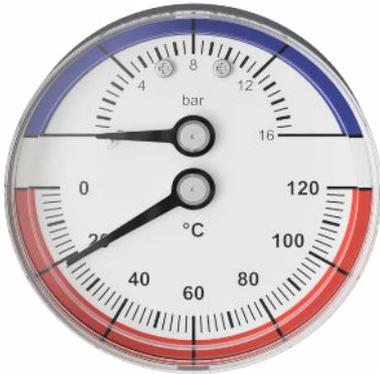

## Overview


The thermomanometer, as part of the S3 Manifold, allows for convenient monitoring of temperature and pressure simultaneously, providing a comprehensive view of the system's performance.

This combined measurement capability assists installers and users in maintaining optimal operating conditions, making it easier to adjust settings and troubleshoot any potential issues.

## Technical specifications

<b>Pressure range</b>	16 bar
<b>Pressure accuracy</b>	±2.5%
<b>Temperature range</b>	0 - 120°C
<b>Temperature accuracy</b>	±2%
<b>System test pressure</b>	max. 10 bar (20 °C)
<b>Casing</b>	Black steel case, chrome plated friction ring fixed with screws
<b>Window</b>	Glass
<b>Face and pointer</b>	Aluminium
<b>Temperature element</b>	Bimetal coil
<b>Wetted parts</b>	Copper tube and connection
<b>Movement</b>	Brass
<b>Connection</b>	Lower and back mount

# Dimensions

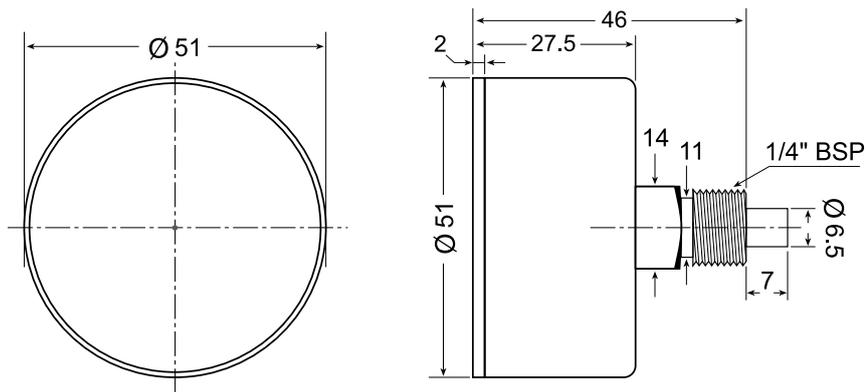

# Contact

## Warmup plc

www.warmup.co.uk T: 0345 345 2288

uk@warmup.com F: 0345 345 2299

Warmup plc ■ 704 Tudor Estate ■ Abbey Road ■ London ■ NW10 7UW ■ UK

Warmup GmbH ■ Ottostraße 3 ■ 27793 Wildeshausen ■ DE

Warmup - TS - S3 Thermomanometer - V1.0 - 2023-05-03\_EN

**Warmup**